


Supreme Duty Hose Reels

T Series

T Series spring driven hose reels are the toughest hose reels in the spring driven line. The extra large chassis is strongly supported by dual pedestal-style arms that span from the roller guide bracket down to the sturdy mounting base. They're perfect for off-road applications that demand reliability in the most abusive and demanding environments.


T SERIES Offers...

- Dual Pedestal-Style Support Arms & Base
- Triple Axle Support Points To The Centre Shaft With Super Hub™ Axle Support System
- Built For Rugged Mobile Applications
- Solid Brass BSP Swivel (except 1" models)

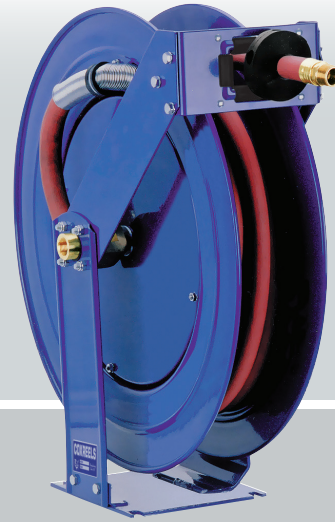

MODEL// TSH-N-350-BGX

Triple axle support with Super Hub™ & a full frame for extra strength



MOTOR

MANUAL

SPRING

Drive Type

Spring

Media

Air

Water

Oil

Grease

Swivel material

Brass

Seal material

Nitrile

All models with suffix BGX come with a BSP inlet & outlet



Also available in



Please prefix the desired reel with "EZ-"

* Models are not available in EZ-Coil


Also available in



Please see page 25

DIMENSIONS

SIZE	A	B	C	D	E	L	M
1	222	538	498	203	229	178	203
2	235	538	498	203	229	178	203
3	235	648	584	203	229	178	203
4	248	538	498	203	229	178	203
5	248	648	584	203	229	178	203
6	254	648	584	203	229	178	203
7	273	648	584	203	229	178	203
8	318	648	610	203	229	178	203

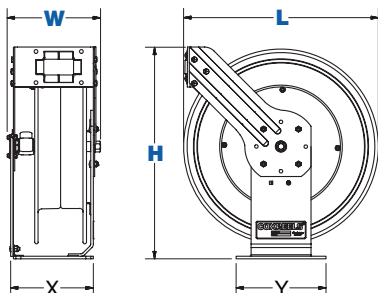

LOW PRESSURE // Air & Water

MODEL hose	MODEL no hose	I.D.	O.D.	Length	BAR	Inlet	Outlet	KG hose	KG no hose	Size
TSH-N-350-BGX	TSHL-N-350-BGX	10 mm	17 mm	15 m	21	3/8"	3/8"	28	25	1
TSH-N-375-BGX	TSHL-N-375-BGX	10 mm	17 mm	23 m	21	3/8"	3/8"	37	33	3
TSH-N-3100-BGX	TSHL-N-3100-BGX	10 mm	17 mm	30 m	21	3/8"	3/8"	39	34	3
TSH-N-3125-BGX	TSHL-N-3125-BGX	10 mm	17 mm	38 m	21	3/8"	3/8"	47	41	3
TSH-N-450-BGX	TSHL-N-450-BGX	12 mm	21 mm	15 m	21	1/2"	1/2"	29	25	2
TSH-N-475-BGX	TSHL-N-475-BGX	12 mm	21 mm	23 m	21	1/2"	1/2"	37	32	3
TSH-N-4100-BGX	TSHL-N-4100-BGX	12 mm	21 mm	30 m	21	1/2"	1/2"	43	36	3
TSH-N-535-BGX	TSHL-N-535-BGX	19 mm	29 mm	11 m	21	3/4"	3/4"	35	30	5
TSH-N-550-BGX	TSHL-N-550-BGX	19 mm	29 mm	15 m	21	3/4"	3/4"	38	32	5
TSH-N-575-BGX*	TSHL-N-575-BGX	19 mm	29 mm	23 m	21	3/4"	3/4"	42	33	8
TSH-N-635*	TSHL-N-635	25 mm	37 mm	11 m	21	1"	1"	42	34	6
TSH-N-650*	TSHL-N-650	25 mm	37 mm	15 m	21	1"	1"	44	35	8

Maximum temp. 65°C reels without hose can be used for air, water & oil

MEDIUM PRESSURE // Air, Water & Oil

MODEL hose	MODEL no hose	I.D.	O.D.	Length	BAR	Inlet	Outlet	KG hose	KG no hose	Size
TMP-N-350-BGX	TMPL-N-350-BGX	10 mm	17 mm	15 m	210	3/8"	3/8"	34	28	2
TDMP-N-350**	TDMPL-N-350*	10 mm	17 mm	15 m	210	3/8"	3/8"	47	36	7
TMP-N-375-BGX	TMPL-N-375-BGX	10 mm	17 mm	23 m	210	3/8"	3/8"	45	36	3
TMP-N-3100-BGX	TMPL-N-3100-BGX	10 mm	17 mm	31 m	210	3/8"	3/8"	48	37	3
TMP-N-450-BGX	TMPL-N-450-BGX	12 mm	21 mm	15 m	175	1/2"	1/2"	35	29	2
TDMP-N-450**	TDMPL-N-450*	12 mm	21 mm	15 m	175	1/2"	1/2"	48	35	7
TMP-N-475-BGX	TMPL-N-475-BGX	12 mm	21 mm	23 m	175	1/2"	1/2"	45	36	3
TMP-N-4100-BGX	TMPL-N-4100-BGX	12 mm	21 mm	30 m	175	1/2"	1/2"	48	36	3
TMP-N-525-BGX	TMPL-N-525-BGX	19 mm	29 mm	8 m	105	3/4"	3/4"	30	26	4
TMP-N-535-BGX	TMPL-N-535-BGX	19 mm	29 mm	11 m	105	3/4"	3/4"	40	34	5
TMP-N-550-BGX	TMPL-N-550-BGX	19 mm	29 mm	15 m	105	3/4"	3/4"	43	34	5
TMP-N-575-BGX*	TMPL-N-575-BGX	19 mm	29 mm	23 m	105	3/4"	3/4"	45	35	8
TMP-N-650*	TMPL-N-650	25 mm	37 mm	15 m	88	1"	1"	53	37	8

Reels with hose come with one wire braid hose suitable for air, water & oil with a maximum temp. 99°C

**Reels are supplied with dual hydraulics hose No 5

HIGH PRESSURE // Air, Water, Oil & Grease

MODEL hose	MODEL no hose	I.D.	O.D.	Length	BAR	Inlet	Outlet	KG hose	KG no hose	Size
THP-N-150-BGX	THPL-N-150-BGX	6 mm	12 mm	15 m	350	1/4"	1/4"	34	28	2
THP-N-1100-BGX	THPL-N-1100-BGX	6 mm	12 mm	30 m	350	1/4"	1/4"	47	37	3
THP-N-350-BGX	THPL-N-350-BGX	10 mm	17 mm	15 m	280	3/8"	3/8"	35	30	4
THP-N-375-BGX	THPL-N-375-BGX	10 mm	17 mm	23 m	280	3/8"	3/8"	44	36	5

Maximum temp. 99°C